

G200 SERIES

INSWING CASEMENT

Enhance your building's design with a variety of configurations that add a sleek, architectural touch to your casement windows. Our Peerless casement windows come with both right-hand and left-hand hinge options. Designed with advanced thermal breaking technology, these windows deliver superior performance in air, water, and thermal efficiency.





PRODUCT DATA	
	PERFORMANCE
Certification	AW 100
Test Size	48"x72"
U-Value	0.32
Air Infiltration Rate @ 6.24 psf	<0.1 cfm/sf
Water Test Pressure	15 psf
Design Pressure	100 psf
Frame Depth	31/4"
Thermal Break Design	Polyamide Strut
Standard Glass Thickness	1"
Glazing Material	Dry Glazed
OITC/STC	Up to 40 / Up to 46


^{*}Glass package may effect data.



FEATURES AND BENEFITS

- Versatile frame fits multiple glass types for low U-values
- Color options: wide range of interior/exterior finishes, including metallic powder coats
- Single-handle operation for all perimeter locks
- Optional key handle for secure, locked vent access
- · Adjustable vent hardware for easy tuning
- Continuous head, sill, and jamb no mullions required
- · Flange designs minimize field trimming
- · Glass film for easier cleaning
- · Dry exterior gaskets for simple re-glazing

TYPICAL CONFIGURATIONS

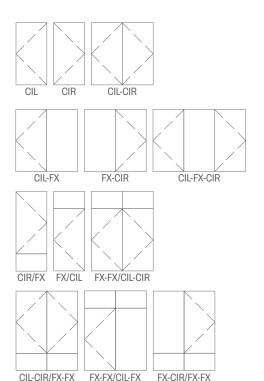

^{*}Please consult your project engineer for additional configuration options.

