

G200 SERIES

PROJECT IN

Enhance your project's curb appeal with the distinctive look of our projection windows. Designed to complement any style seamlessly, they deliver outstanding performance to meet your energy and efficiency needs—while maximizing natural light.





FEATURES AND BENEFITS


- Versatile frame fits multiple glass types for low U-values
- Color options: wide range of interior/exterior finishes, including metallic powder coats
- Single-handle operation for all perimeter locks
- Optional key handle for secure, locked vent access
- Adjustable vent hardware for easy tuning
- Continuous head, sill, and jamb – no mullions required
- Flange designs minimize field trimming
- Glass film for easier cleaning
- Dry exterior gaskets for simple re-glazing

PRODUCT DATA

	PERFORMANCE
Certification	AW 100
Test Size	60"x36"
U-Value	0.33
Air Infiltration Rate @ 6.24 psf	<0.1 cfm/sf
Water Test Pressure	15 psf
Design Pressure	100 psf
Frame Depth	3¾"
Thermal Break Design	Polyamide Strut
Standard Glass Thickness	1"
Glazing Material	Dry Glazed
OITC/STC	Up to 34 / Up to 42

*Glass package may effect data.

TYPICAL CONFIGURATIONS

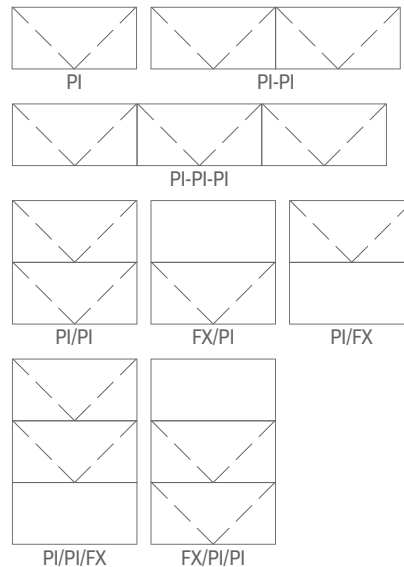

*Please consult your project engineer for additional configuration options.



VISIT OUR WEBSITE



SEE EVERYTHING WE HAVE TO OFFER!
VISIT PEERLESSPRODUCTS.COM