


COMPRESSION SLIDING DOOR

COMPRESSION SLIDER

The Peerless compression sliding glass door is engineered for superior strength, energy efficiency, aesthetic appeal, and effortless operation. Designed with ¾" sill, it has been rigorously tested to meet AAMA life cycle specifications, ensuring long-lasting performance. Its exceptional thermal efficiency is achieved through specialized component integrated into the frame.

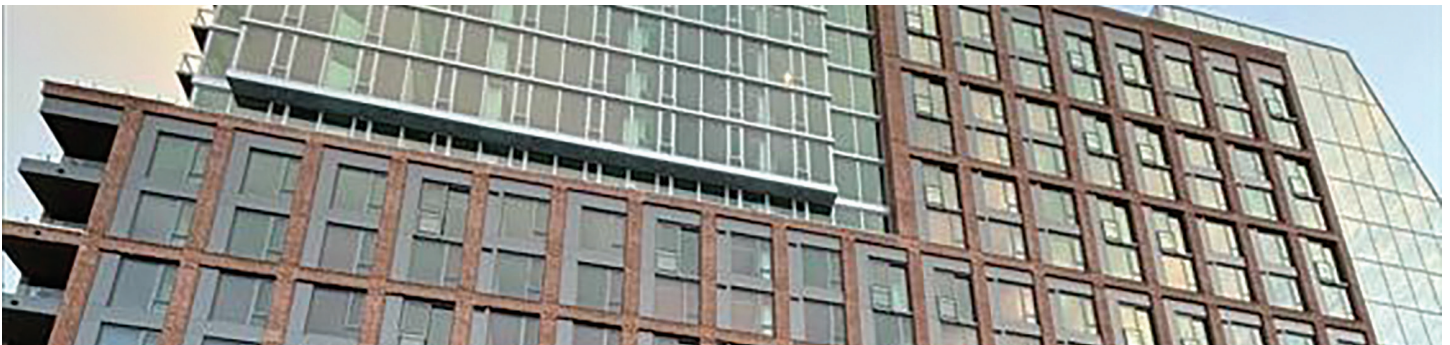

PRODUCT DATA

	PRODUCT #
Certification	CW 50
U-Value	0.43
Air Infiltration Rate @ 6.24 psf	<0.1 cfm/sf
Water Test Pressure	12 psf
Design Pressure	50 psf
Frame Depth	4¼"
Standard Glass Thickness	1"
Glazing Material	Dry Glazed
OITC/STC	Up to 25 / Up to 35

*Glass package may effect data.



**VISIT OUR
WEBSITE**



SEE EVERYTHING WE HAVE TO OFFER!
VISIT [PEERLESSPRODUCTS.COM](https://www.peerlessproducts.com)

FEATURES AND BENEFITS

- Lock points engage and release smoothly
- Reinforced continuous frame for strength
- Optional thumb lock or key lock for security
- Smooth and easy operation