

G900 FX



FEATURES AND BENEFITS


- Versatile frame fits multiple glass types for low U-values
- Color options: wide range of interior/exterior finishes, including metallic powder coats
- Continuous head, sill, and jamb – no mullions required
- Flange designs minimize field trimming
- Glass film for easier cleaning
- Dry exterior gaskets for simple re-glazing
- 10 yr. product, 20 yr. glass, and up to 30 yr. finish

PRODUCT DATA

	PERFORMANCE
Certification	AW 100
U-Value	0.12
Air Infiltration Rate @ 6.24 psf	<0.1 cfm/sf
Water Test Pressure	15 psf
Design Pressure	100
Frame Depth	5"
Thermal Break Design	Polyamide Strut
Standard Glass Thickness	1"
Glazing Material	Dry Glazed
OITC/STC	Up to 34 / Up to 41
Test Size	36"x60"

*Glass package may effect data.

TYPICAL CONFIGURATIONS

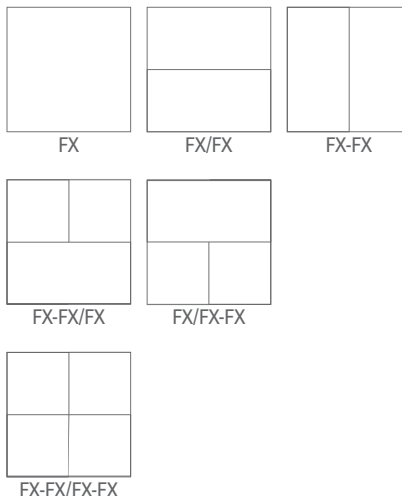

*Please consult your project engineer for additional configuration options.



VISIT OUR WEBSITE



SEE EVERYTHING WE HAVE TO OFFER!
VISIT PEERLESSPRODUCTS.COM