


G900 IS CSMT

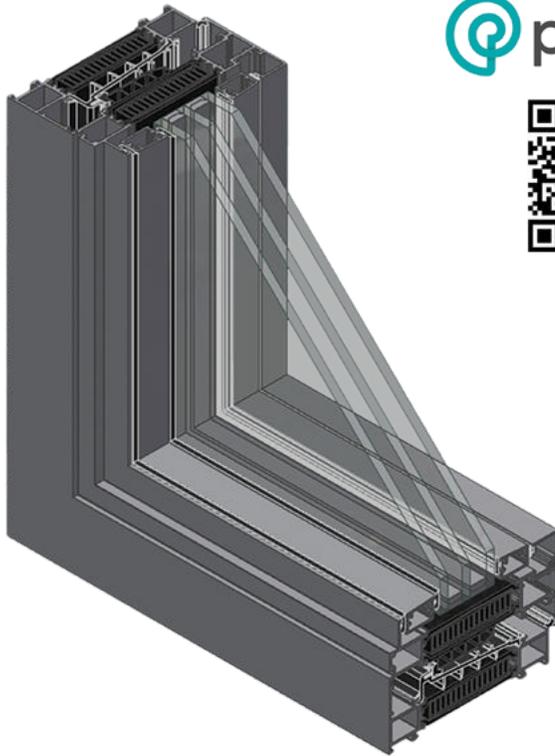

FEATURES AND BENEFITS

- Highest performing Peerless window series
- Both right hand and left hand hinge options
- Versatile frame fits multiple glass types for low U-values
- Color options: wide range of interior/exterior finishes, including metallic powder coats
- Single-handle operation for all perimeter locks
- Optional key handle for secure, locked vent access
- Adjustable vent hardware for easy tuning
- Continuous head, sill, and jamb – no mullions required
- Flange designs minimize field trimming
- Glass film for easier cleaning
- Dry exterior gaskets for simple re-glazing

PRODUCT DATA

	PRODUCT #
Certification	AW 100
U-Value	0.32
Air Infiltration Rate @ 6.24 psf	<0.1 cfm/sf
Water Test Pressure	15 psf
Design psf	100
Frame Depth	5"
Typical Wall Thickness	0.08"
Thermal Break Design	Polyamide Strut
Standard Glass Thickness	1"
Glazing Material	Dry Glazed
OITC/STC	Up to 34 / Up to 41
Test Size	36"x60"

*Glass package may effect data.







VISIT OUR WEBSITE



SEE EVERYTHING WE HAVE TO OFFER!
VISIT PEERLESSPRODUCTS.COM

TYPICAL CONFIGURATIONS

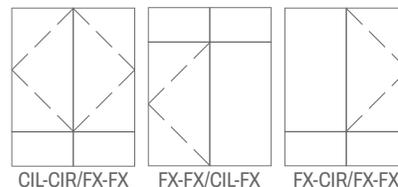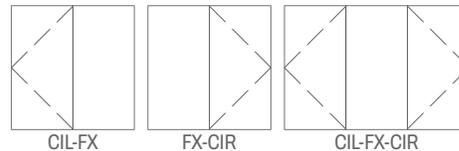

*Please consult your project engineer for additional configuration options.